


Maya Model M24 – Quick Start Guide

1

- 1) Power off Provider Modem
- 2) Power off Wi-Fi Device or Switch
- 3) Disconnect existing LAN cable(s) from Provider Modem (dashed yellow)
- 4) Connect one LAN cable to M24 as shown (solid yellow)
- 5) Connect any additional LAN cables to the Wi-Fi Device or Switch (solid blue)
- 6) Connect Maya WAN Port to Provider Modem's Ethernet Port (solid black)

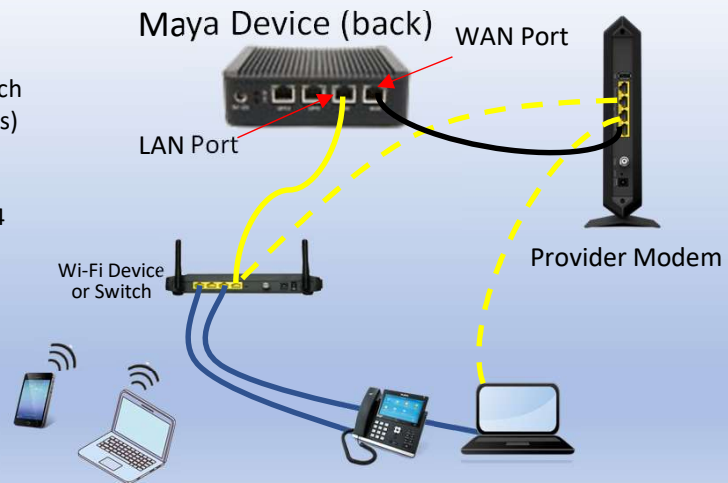

2

Maya Device (back)



Maya Device (front)



- 1) Connect power supply to the M24 and plug into an outlet
- 2) Power on the Provider Modem
- 3) Power on the Maya M24
- 4) Wait 2-3 minutes for the M24 to boot up
- 5) Power on the Wi-Fi Device or Switch
- 6) Check that all LAN devices can get to the Internet
- 7) If not, power off/on the LAN devices to get them a new IP address

3

NOTE: Either disable the Wi-Fi service from the Provider Modem or change all your Wi-Fi devices to use the SSID from the Wi-Fi router on the LAN side of the Maya Device. All LAN traffic needs to pass thru the Maya device so we can ensure real time traffic gets priority.

Still Need Help?

support@mayags.com
+1 (708) 434-1119
www.mayags.com

