


Maya Model M12B – Quick Start Guide

1

- 1) Power off Provider Modem
- 2) Power off Wi-Fi Device or Switch
- 3) Disconnect existing LAN cable(s) from Provider Modem (dashed yellow)
- 4) Connect one LAN cable to M12B as shown (solid yellow)
- 5) Connect any additional LAN cables to the Wi-Fi Device or Switch (solid blue)
- 6) Connect Maya WAN Port to Provider Modem's Ethernet Port (solid red)

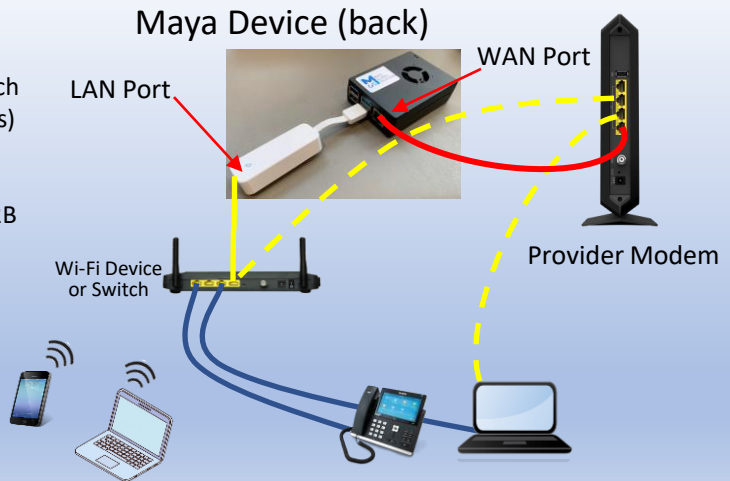

2

Maya Device (side)



- 1) Connect power supply to the M12B and plug into an outlet
- 2) Power on the Provider Modem
- 3) Power on the Maya M12B
- 4) Wait 2-3 minutes for the M12B to boot up
- 5) Power on the Wi-Fi Device or Switch
- 6) Check that all LAN devices can get to the Internet
- 7) If not, power off/on the LAN devices to get them a new IP address

3

NOTE: Either disable the Wi-Fi service from the Provider Modem or change all your Wi-Fi devices to use the SSID from the Wi-Fi router on the LAN side of the Maya Device. All LAN traffic needs to pass thru the Maya device so we can ensure real time traffic gets priority.


Still Need Help?

support@mayags.com
+1 (650) 200-0441
www.mayags.com



Maya Model M12B – Port Guide

Maya Device (back)

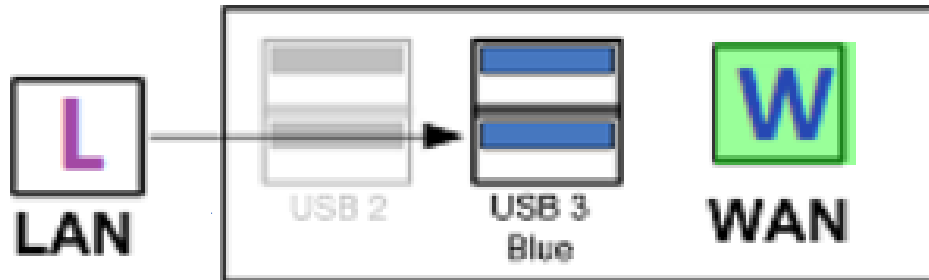

**USB to
Ethernet
Adapter**